


NEWAGE

Driveline Solutions

915 SERIES AXLE

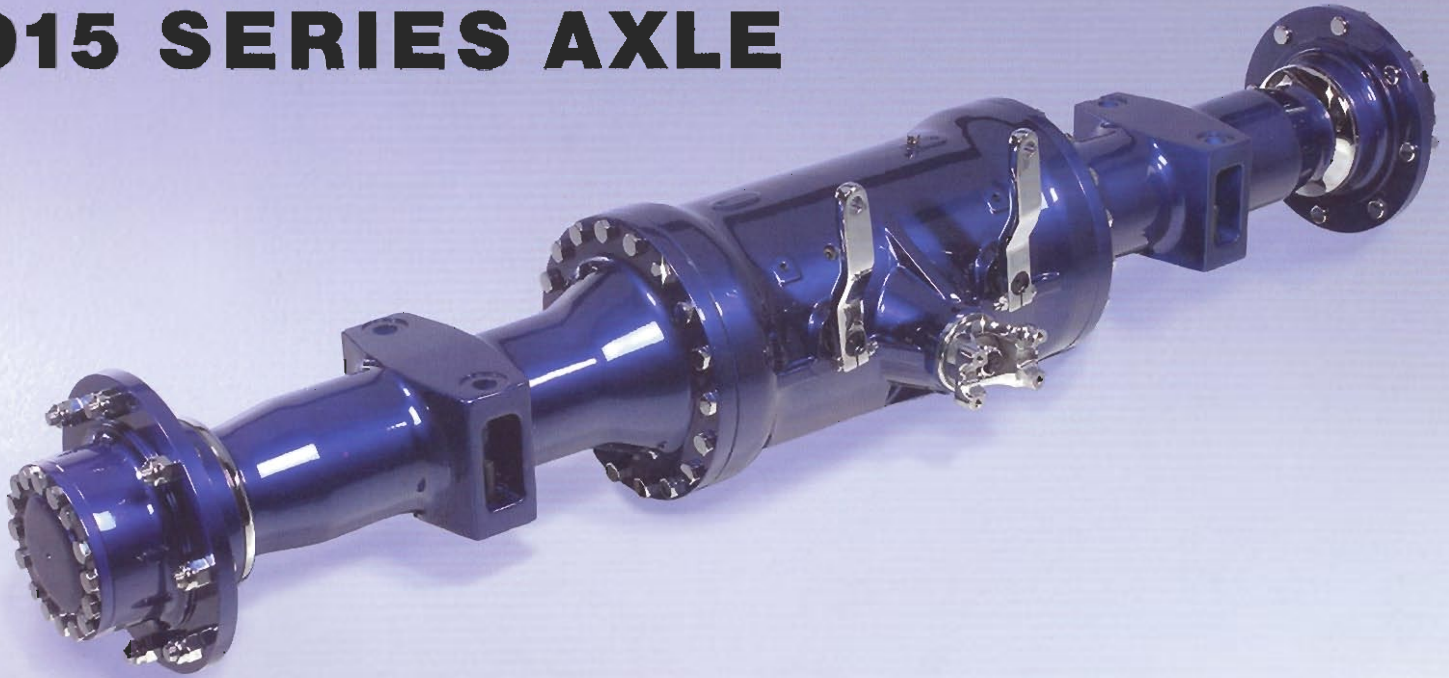

OVERALL AXLE RATIO

- 15.8:1

MAXIMUM LOAD RATING

- 10000 kg (22046 lb) based on 1840 mm wheel track and axle mountings at 1120 mm centres.

TORQUE

- Nominal output torque at both wheels is 32373 Nm (23874 lbf.ft).

BRAKES

- The standard brake has two discs, providing maximum braking torque at both wheels of: 28792 Nm (21233 lbf.ft).
Hydraulic operating pressure: 60 bar (900 psi).

PARKBRAKE (OPTIONAL)

- Maximum braking torque at both wheels: 23600 Nm (17404 lbf.ft).
Cable pull at axle: 2670 N (600 lbf), operating at 180 mm centres.


APPROXIMATE WEIGHT

- 405 kg (893 lb)

APPROXIMATE OIL CAPACITY

- 15 litres (26.4 pints)



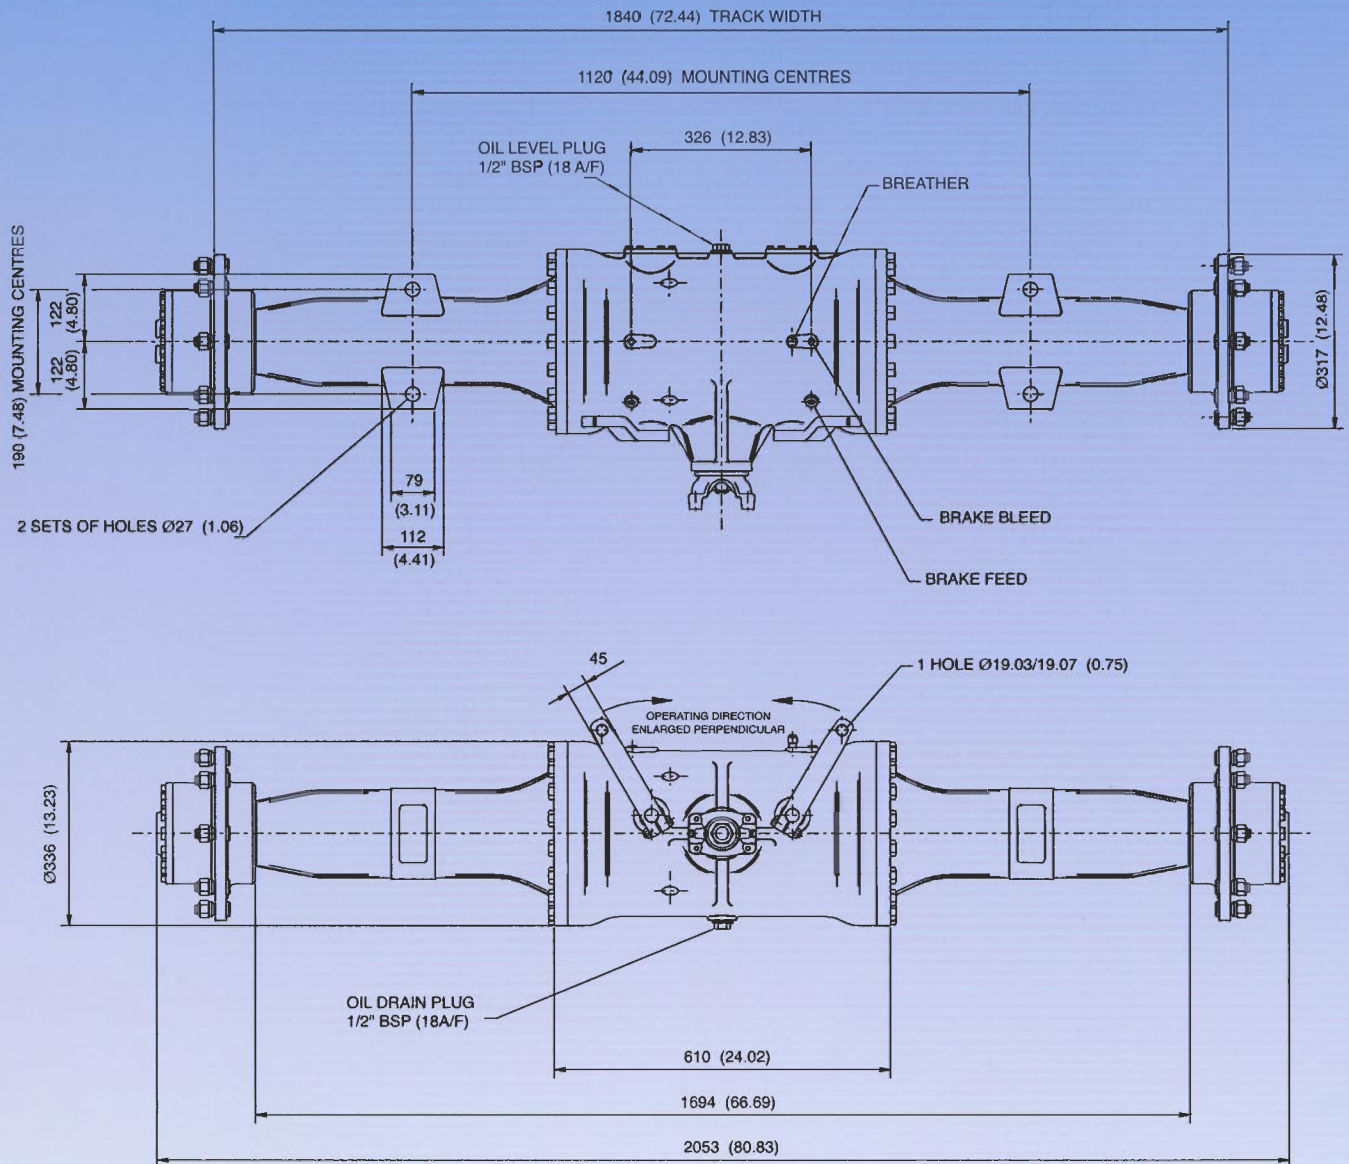

WHEEL FIXING OPTIONS

- 8 studs: M18 thread x 2 mm pitch on 275 mm PCD, with 220 mm wheel spigot diameter.
- 8 studs: 7/8" BSF on 275 mm PCD, with 220 mm wheel spigot diameter.

MOUNTING OPTIONS

- 2 off 27 mm diameter holes: 266 mm hole centres on rigid mounting pads, with 1250 mm mounting centres.
- 2 off 27 mm diameter holes: 190 mm hole centres on rigid mounting pads, with 1120 mm mounting centres.



Certificate No. Q10728.

Note:

In line with our policy of continuous product development and improvement, specifications of Newage driveline equipment may be subject to change without notice.



EXCLUSIVE AUTHORIZED DISTRIBUTOR

MARINDUSTRIEL
8550, DELMEADE
MONTREAL, (QC) H4T 1L7
TÉLÉ. : 514.342.2748
800.363.2259
FAX : 514.342.6151
info-quebec@marind.ca

MARINDUSTRIAL INC.
80, HARRISVILLE BLVD, UNIT « A »
MONCTON, (NB) E1H 3N4
PHONE : 506.852.3332
800.463.3332
FAX : 506.857.8484
info-atlantic@marind.ca

MARINDUSTRIAL ONTARIO INC.
2320, BRISTOL CIRCLE, UNIT # 8
OAKVILLE, (ON) L6H 5S3
PHONE : 905.829.3004
800.866.3831
FAX : 905.829.4046
info-ontario@marind.ca